



# FT-200 Fire Training Fog Machine User Manual



ENGLISH

© 2017 Antari Lighting and Effects Ltd.





## *User Manual - English*

### **Safety Information**



Please read the following safety information carefully before operating the machine. This information includes important safeguards about installation, usage, and maintenance. Pay attention to all warning labels and instructions in this manual and printed on the machine.

If you have questions about how to operate the machine safely, please contact your local Antari dealer for help.

- Keep this device dry.
- Always connect to a grounded circuit to avoid risk of electrocution.
- Before connecting machine to power, always check voltage indicate on machine match to your local AC voltage. Do not use the machine if AC power voltage does not match.
- Disconnect the machine from AC power before servicing and when not in use.
- This product is for indoor use only! Do not expose to rain or moisture. If fluid is spilled, disconnect AC power and clean with a damp cloth. If fluid is spilled onto electronic parts, immediately unplug the machine and contact your local Antari dealer for advice.
- No user serviceable and modifiable parts inside. Never try to repair this product, an unauthorized technician may cause damage or malfunction to the machine.
- For adult use only. Never leave the machine running unattended.
- Installed the machine in a well-ventilated area. Provide at least 50 cm space around the machine.
- Never add flammable liquid of any kind to the machine.
- Make sure there are no flammable materials close to the machine while operating.
- Only use Antari fluid. Other fluid may lead to heater clog and malfunction.
- If the machine fails to work, unplug the machine and stop operation immediately. Contact your local Antari dealer for advise.

- Before transporting the machine, make sure the fluid tank is completely drained.
- Fog fluid may present health risks if swallowed. Do not drink fog fluid. Store it securely. In case of eye contact or if fluid is swallowed, immediately look for medical advice.
- If the supply cord is damaged, it must be replaced by a special cord or assembly available from the manufacturer or its service agent.
- The appliance is not to be used by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge
- Children being supervised not to play with the appliance

## Unpacking and Inspection

Immediately upon receiving the machine, carefully unpack the carton, check the content to ensure that all parts are present and have been received in good condition. If any parts appear damaged or mishandled from shipping, notify the shipper immediately and retrain the packing material for inspection.


**What is included:**

- 1 x FT-200 Fog Machine
- 1 x W-2 Wireless Remote
- 1 x Power Cord
- 1 x User Manual

## Product Dimensions



## Product Overview

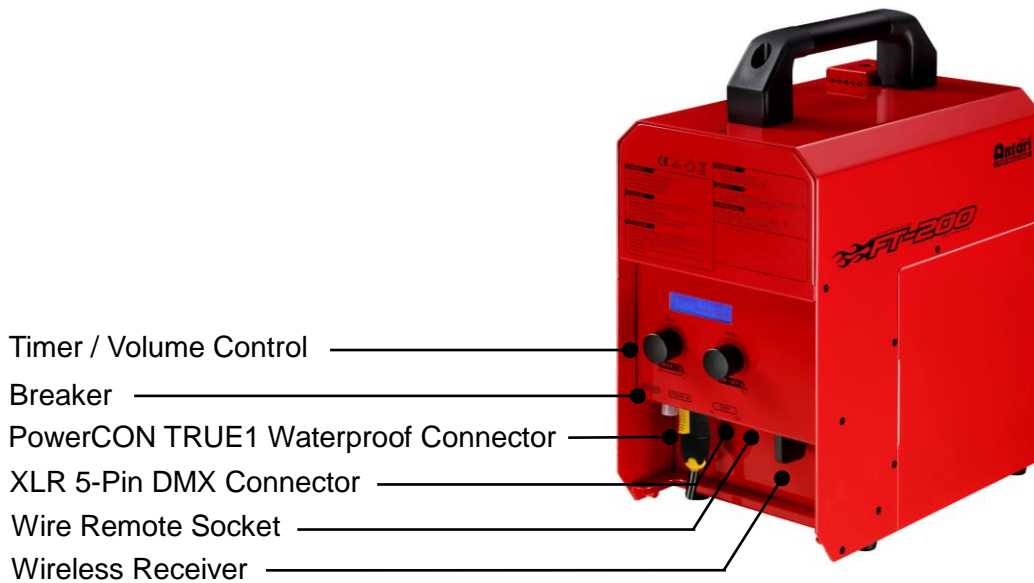

## Setting Up



**IP33 RATING ONLY WHEN OPERATED UPRIGHT / VERTICAL POSITION.**

**Step 1:** Place the machine on a flat surface and in a suitable large area with at least 50 cm open space around the machine.

**Step 2:** Fill the fluid tank with Antari approved fluid.

**Step 3:** Connect the machine to suitable rated power supply. To determine the power requirement for the machine refer to the label on the back of the machine.



Always connect the machine to a protected circuit and ensure it is properly grounded to avoid risk of electrocution.

**Step 4:** Turn on the machine and allow it to heat up. Heat up takes approximately 7.5 minutes. Once the machine has reached operating temperature, the LCD display will show “Ready To Fog”. Now the machine is ready for operation.


**Step 5:** To start making fog, locate the rotary knob on the right side of control panel, and press the rotary knob to start making fog.

**Step 6:** To turn off the machine, press rotary knob button again and turn Powercon to the **OFF** position.

## Operation

### Control Panel Operation

The machine can be operated with the onboard digital control interface.

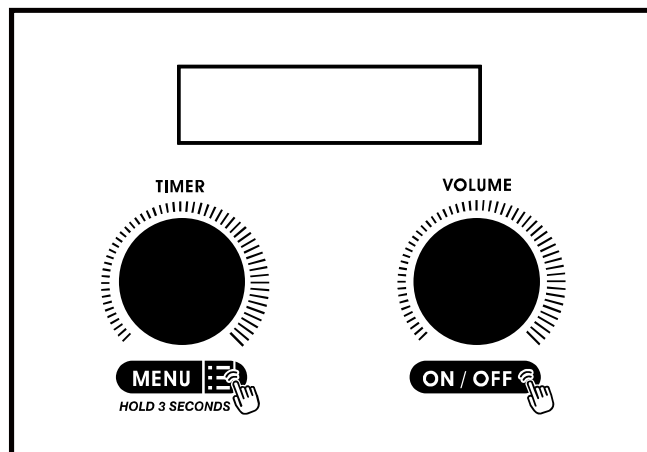

### Operation - Timer Mode

Rotary knob	Action	Description
Left	Press once	Activate timer mode
Right	Press second time	Deactivate timer mode
Right	Rotate	Adjust output volume

### Operation – Volume Mode

Rotary knob	Action	Description
Right	Press once	Activate volume mode
Right	Press second time	Deactivate volume mode
Right	Rotate	Adjust output volume

### Setting

Rotary knob	Action	Description
Left	Press and hold for 3 seconds	Enter setting menu
Left	Rotate	Scroll through menus
Left	Press	Press once to enter
Left	Rotate	Adjust for preferred value
Right	Press	Escape from menu

### **Control Menu**

Interval Set XXX S
-----------------------

Set interval time from 5 to 200 seconds

Duration Set XXX S
-----------------------

Set duration time from 1 to 200 seconds

Timer Output XXX %
-----------------------

Set output volume from 1 to 100%

Volume Output  
XXX %

Set output volume from 1 to 100%

DMX512  
Address:XXX

Set DMX address from 1 to 512

Wireless  
ON

Turn ON or OFF wireless remote feature

Run Last Setting  
OFF

Turn ON or OFF memory setting. When turned "ON", the machine will return to its original state before last shut off.

Keypad Sound  
ON

Turn ON or OFF rotary knob sound

Wireless Detect  
Pair

Pair or unpair wireless remote

Nonstop Burst  
OFF

Turn ON or OFF nonstop burst function. Once the machine is turned on, it can produce output continuously without reheating.

### ***Wireless Operation***

Wireless remote control system W-2 consists of a transmitter equipped with four buttons to activate, deactivate, increase and decrease fog output and an onboard receiver attached to the rear panel of FT-200 fog machine.



*W-2 Wireless Transmitter*



Press [A] button to emit fog. Press [B] button to stop. Press [C] button to increase output volume. Press [D] button to decrease output volume.

In a free open space the effective distance is 50 meters, actual usage depending on obstacle level the effective distance is 10-25 meters.



*Wireless Receiver*

### ***Registering a transmitter***

Transmitters can be paired or deleted from the receiver. Each receiver can pair up to 5 transmitters. Follow the steps below to pair or delete a transmitter from a receiver.

Step 1: Press and hold the left rotary knob for 3 seconds to enter setting menu.

Step 2: Rotate the rotary knob to find the “Wireless Detect” menu.


Step 3: Follow the menu instruction to pair or delete a transmitter.

### ***Transmitter battery replacement***

If the effective distance seems to decrease, it is possible the battery level is low and requires replacement. In order to replace the battery, undo the three screws on the back of transmitter to release the cover. Replace with same type and specification of battery which is 27A 12V

### ***DMX Connector Pin Assignment***

The machine provides 5-pin XLR connectors for DMX connection. The diagram below indicates pin assignment information.

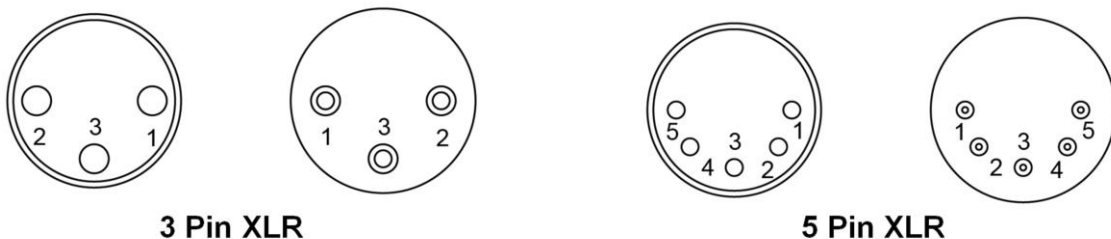

Pin	Function
1	Ground
2	Data-
3	Data+

### DMX Channel Function

Channel 1	DMX Value Range	Function
Fog	0 – 4	Fog Off
	5 – 255	Output 1-100%

## Fluid



Only use Antari FLP water-based liquid for the FT-200 Fire Training Fog Machine. The machine is tested and calibrated with this liquid to get the best output performance. Warranty will be void if any other type of liquid is used, improper use of liquid may lead to machine failure and malfunction.

## Service and Maintenance

- Do not allow the machine to become contaminated.
- Remove dust from air vents with air compressor, vacuum or a soft brush.
- Only use a damp cloth to clean the casing.
- Before storing run distilled water through the system to help avoid condensing the pump or heater.
- It is recommended to run the machine on a monthly basis in order to achieve best performance and output condition.
- Excessive dust, liquid and dirt built up will degrade performance and cause overheating.

## Breaker Reset



Disconnect AC power before resetting the breaker. Only replace fuse with same type and rating.

*Step 1:* Disconnect AC power.

*Step 2:* Flip breaker to ON position.

*Step 3:* Turn on machine for testing.

## Breaker

120V = 13.5A 250V

230V = 7A 250V

## Technical Specifications

Input voltage	US 120V    EU 230V UK 240V    JP 100V
Breaker	120V = 13.5A 250V 230V = 7A 250V
Heater	1600W
Warm-up time	7.5 min. (approx.)
Max. operating time	8 min. at 100% output
Fluid tank capacity	2.4 L
Fluid consumption	270 ml/min
Compatible fluid	Antari FLP water-based fluid
Control option	DMX 512, Manual, Timer, W-2 Wireless remote , Z-3 Remote (optional)
DMX channels	1 channel
Power connection	Neutrik PowerCON TRUE1
DMX data connection	5-pin XLR
Dimension	L 301 x W 194 x H 414 mm
Dry weight	16 kg
IP Rating	IP33 Rating



For current product information visit Antari at: [www.antari.com](http://www.antari.com)  
For information requests please contact us at: [sales@antari.com](mailto:sales@antari.com)



**KiLiAN Fire & Safety GmbH & Co.KG**

Franz-Betz-Str. 28, D-94227 Zwiesel

Tel.: +49 (0)9922/734 o. 802585 - Mobil: +49 (0)171/5113502

Fax: +49 (0)9922/802586

Email: [info@kilian-brandschutz.de](mailto:info@kilian-brandschutz.de) - [www.kilian-brandschutz.de](http://www.kilian-brandschutz.de)

C08FT2001

[www.antari.com](http://www.antari.com)